


Connecting the Microphone Boom to the Headphone Cable

When attaching the Microphone Boom to the Headphone Cable, care must be taken to ensure the components will not be damaged by being pressed together while misaligned.

1. Align the plug and jack by gently centering the tip of the gold plug in the Microphone Boom with the gold jack inside the Headphone Cable. When properly aligned the plug will drop slightly inside of the opening of the jack.
2. While keeping the Microphone Boom and Headphone Cable parallel to each other, gently press the two components together. The Microphone Boom should seat easily with very little pressure required and *snap* into place.
3. Once the two components are firmly seated together, turn the Microphone Boom around the pivot axis about 90 degrees in both directions to ensure it is fully seated.

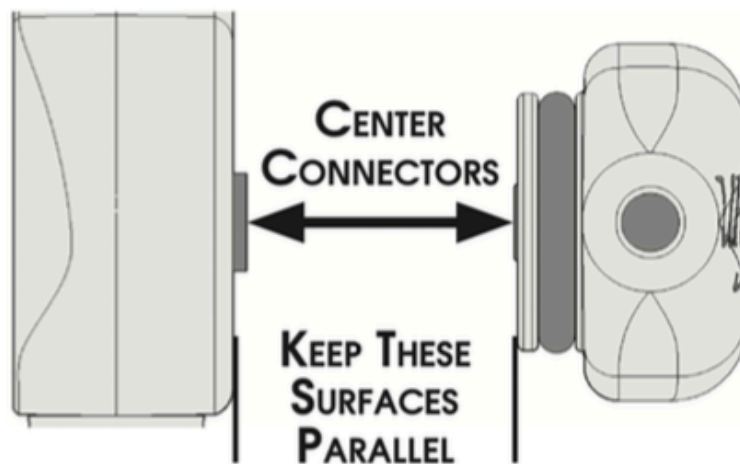

Disconnecting the Microphone Boom

To disconnect, firmly grasp the plastic housing of the Microphone Boom with three fingers (*thumb and middle finger squeezing the tapered section with the index finger on the far back side*). Gently separate it by pulling it away perpendicular to the pivot axis.

If the Microphone Boom does not release easily, gently turning the microphone around the pivot axis will often help to unseat it.